



NORTHWEST WATER TREATMENT, INC.

WATER SOFTENING SYSTEMS

FOR COMMERCIAL/INDUSTRIAL APPLICATIONS

- Commercial water softening systems suitable for applications ranging from 60,000 to 1,200,000 grains of hardness removal, at flow rates from 10 to 200 gallons per minute.
- Top mounted Fleck control system, with 1", 1-1/2", 2", and 3" valves

SOFTENER FEATURES

◆ Control Valve

Five cycle, brass, very reliable Fleck control valve is available with 7 or 12 day clock for regeneration initiation.


◆ Media Tank

Conditioner tanks incorporate a seamless, one piece thermoplastic liner, overwound with epoxy/ fiberglass laminate that is completely rust and corrosion free. It is approved by NSF, UL, and meets the requirements of WQA standard S-100.

OPTIONS

- ◆ Meter initiated regeneration, with a choice of meter systems.
- ◆ Suitable for use with single or multiple tank systems.
- ◆ Alternate backwash source.
- ◆ Hard water bypass eliminated.

Typical with 2850 control valve.

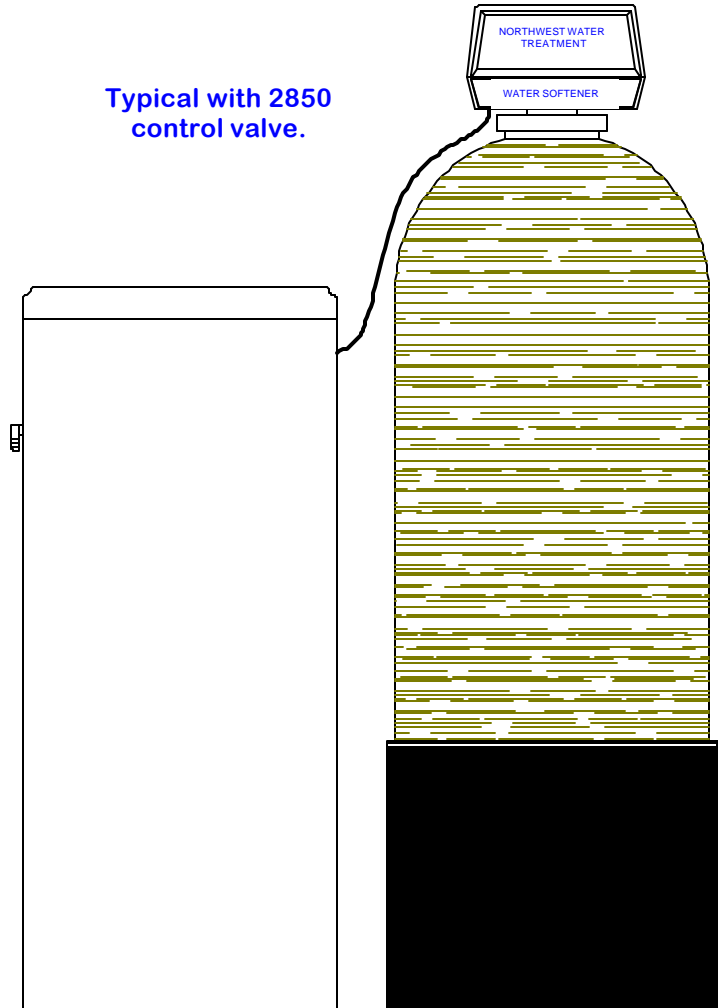

SALES, INSTALLATION, & SERVICE

Northwest Water Treatment, Inc. is a licensed, insured water conditioning equipment contractor, with 24 years of experience in the water treatment field. We provide standard commercial/industrial and residential equipment, or can custom design systems to provide solutions to your most difficult water treatment problems. Our professional installation and service personnel insure the proper operation of your water conditioning system.

NORTHWEST WATER TREATMENT, INC. - KENT WASHINGTON

Phone: 253-630-7177

Toll Free: 1-800-377-7401

Fax: 253-631-6800

www.nwwater-treatment.com

Please see reverse side for dimensions, and specifications

SPECIFICATIONS

WATER SOFTENER MODEL NUMBER	GRAINS CAP.	PIPE SIZE IN.	SERVICE FLOW RATE GPM/PSID	BW FLOW RATE GPM	TANK DIA/SS INCHES	RESIN QTY. FT³	FLOOR SPACE W x D x H	BRINE TANK SIZE/CAP. IN. / LBS	SHIPPING WEIGHT POUNDS
NWT 1252-2750SC	60,000	1	12/10	4	12 x 52	2	42 x 24 x 65	18x40 / 400	250
NWT 1354-2750SC	75,000	1	15/12	5	14 x 65	2.5	42 x 24 x 65	18x40 / 400	300
NWT 1465-2750SC	90,000	1	18/15	5	14 x 65	3.0	42 x 24 x 75	18x40 / 400	375
NWT 1665-2850SC	120,000	1-1/2	33/15	7	16 x 62	4.0	52 x 26 x 75	24x40 / 750	400
NWT 2062-2850SC	180,000	1-1/2	40/15	11	20 x 62	6.0	56 x 26 x 72	24x40 / 750	600
NWT 2260-2850SC	240,000	1-1/2	38/15	13	22 x 60	8.0	58 x 28 x 72	24x40 / 750	700
NWT 2460-2850SC	300,000	1-1/2	40/15	15	24 x 60	10.0	60 x 30 x 72	24x40 / 750	750
NWT 2471-2850SC	360,000	1-1/2	38/15	15	24 x 71	12.0	60 x 30 x 82	24x54 / 1000	850
NWT 2062-2900SC	180,000	2"	67/15	11	20 x 62	6.0	56 x 26 x 78	24x40 / 750	600
NWT 2260-2900SC	240,000	2"	60/15	13	22 x 60	8.0	58 x 28 x 78	24x40 / 750	700
NWT 2460-2900SC	300,000	2"	68/15	15	24 x 60	10.0	60 x 30 x 78	24x40 / 750	750
NWT 2471-2900SC	360,000	2"	68/15	15	24 x 71	12.0	60 x 30 x 89	24x54 / 1,000	850
NWT 3072-2900SC	450,000	2"	84/15	25	30 x 72	15.0	66 x 36 x 90	24x54 / 1,000	1,100
NWT 3672-3150SC	750,000	2"	80/15	35	36 x 72	25.0	72 x 42 x 90	30x60 / 1,500	1,800
NWT 4272-3900SC	900,000	3"	150/15	50	42 x 72	30.0	84 x 48 x 94	30x60 / 1,500	2,200
NWT 4872-3900SC	1,200,000	3"	200/15	60	48 x 72	40.0	90 x 54 x 94	30x60 / 1,500	2,800

Notes:

1. Capacities are based on resin manufacturer's data, and are dependent upon influent water TDS, temperature, pressure, and flow rates. Specifications are based on water that is free of oil, color, and turbidity.
2. Shipping weights are approximate.